


Our 8500 series Slider Window opens horizontally with fewer components offering easy operation and less maintenance.

Slider windows increase outdoor panoramic views and are perfect for areas with limited vertical space while adding updated and modern curb appeal to newly built or remodeled homes.

This reliable window is made with MikronBlend® vinyl using the Duralite® warm-edge spacer system. MikronBlend® has been tested in the harshest environments and provides color fastness and UV protection required in Southern climates.

The Renaissance Slider high-performance 2-panel window (OX; XO) with sliding sash or 3-panel (XOX) with two sliding sashes on each side of a fixed "picture" window meets or exceeds industry standards and the strict thermal and structural Florida building code requirements. This style window is great for replacing large picture windows where ventilation is desired.

Duralite® Spacer

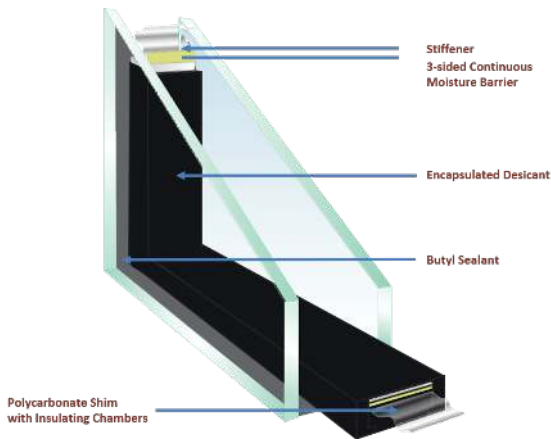


**HIGH STRENGTH TO MEET CRITICAL SPECIFICATIONS
FL 31114 - PERFORMANCE**

Test Size	Air	Water	U-Factor	SHGC	SHGC w/grids	DP Rating
108 x 60	0.16	6.0	0.33	0.22	.20	DP 40

STANDARD DESIGN FEATURES:

- High-performance 5527 Low E Glass
- 3/4" insulated glass sealed with Duralite® warm-edge spacer system maximizes energy efficiency
- Durable low profile metal cam lock with metal keeper: two locks per sash standard on all 2'7" and taller
- Multi-chambered frame increases structural rigidity and thermal performance
- Double Wall glazing towers & Dual-fin weatherstripping
- Moving sash equipped with brass tandem rollers for quiet operation (see below)
- Exterior glaze frame

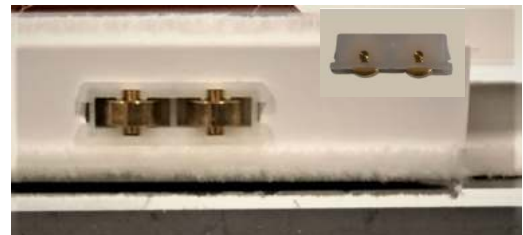

OPTIONAL FEATURES:

- Argon Gas
- DP-50 impact resistance package
- Custom Grille patterns -Simulated Divided Lite (SDL) or Grille-Between-the-Glass (GBG)
- Integral nail fin, box frame & flange option



INTERIOR COLOR OPTIONS



White

EXTERIOR COLOR OPTIONS




Black Bronze White

SDL




GBG

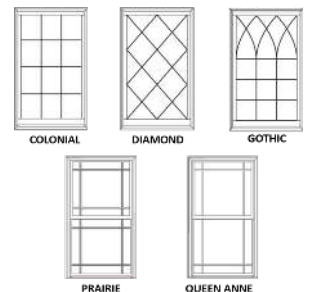

8500 Series - FL 31114 Vinyl Slider Window

DESIGN FEATURES:

- 3/4" Low E insulated glass sealed with Duralite® warm-edge spacer system
- 2 panel (OX; XO) or 3 panel (XOX) available
- Extruded vinyl that resists chipping, pitting, or flaking with virtually no maintenance
- Moving sash equipped with brass tandem rollers for quiet operation
- Durable metal cam lock with metal keeper: two locks per sash standard on all 2'8" and wider
- Reinforced, overlapping & interlocking meeting rail provides metal surface for locking hardware mounting screws, prevents sagging and improves weather resistance

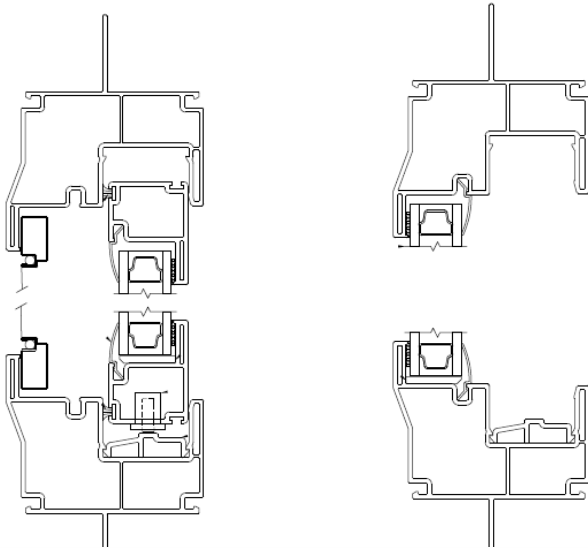

CUSTOM SIZES AVAILABLE:

DIMENSIONS SHOWN REFLECT ROUGH OPENING SIZE FOR INSTALLATION, DEDUCT 3/8" HEIGHT & WIDTH FOR ACTUAL UNIT SIZE

